



MASTER PL-T 4 Pin 4-針腳型

MASTER PL-T 42W/840/4P 1CT/5X10BOX

省電型精巧螢光燈管精巧型長電弧低壓水銀放電燈管套管內含 6 個平行細長螢光燈管

安全提示

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

产品数据

基本資訊	
接口	GX24Q-4 [GX24q-4]
至 50% 故障預熱的使用時間 (標稱)	13000 h
額定 LSF (預熱 2000 小時), 3 小時	99 %
額定 LSF (預熱 4000 小時), 3 小時	98 %
額定 LSF (預熱 8000 小時), 3 小時	97 %
額定 LSF (8000 小時), 3 小時	90 %
照明科技	
色碼	840 [CCT of 4000K (841)]
光通量 (標稱)	3200 lm
光通量 (額定) (標稱)	3050 lm
色彩名稱	冷 白色 (CW)
相關色溫 (標稱)	4000 K
光效 (額定) (最小)	74 lm/W
演色性指數 (標稱)	82


額定 SLMF (2000 小時)	92 %
額定 SLMF (4000 小時)	88 %
額定 SLMF (6000 小時)	86 %
額定 SLMF (8000 小時)	84 %
額定 SLMF (12000 小時)	81 %
運作和電氣	
Power (Rated) (Nom)	41.0 W
燈具電流 (標稱)	0.320 A
溫度	
設計溫度 (標稱)	28 °C
控制調光	
可調光	是

MASTER PL-T 4 Pin 4-針腳型

機械和殼體	
接口資訊	4P
應用	
能源效益標籤 (EEL)	A
汞 (Hg) 含量 (標稱)	1.4 mg
能源消耗 kWh/1000 h	45 kWh
產品參數	
完整產品碼	871150061137670

訂購產品名稱	MASTER PL-T 42W/840/4P 1CT/5X10BOX
EAN/UPC - 產品	8711500611376
訂購代碼	927914884071
分子 - 各件數量	1
分子 - 每一外盒內件數	50
材質編號(12NC)	927914884071
淨重 (件)	83.000 g
ILCOS Code	FSMH-42/40/1B-L/P-GX24q=4

二维绘图




PL-T 42W/840/4P M

Product	D (max)	A (max)	B (max)	C (max)
MASTER PL-T 42W/840/4P 1CT/ 5X10BOX	41.0 mm	120.7 mm	145.0 mm	160.7 mm

光度数据

LDPB_PLT4PN_840-Spectral power distribution B/W


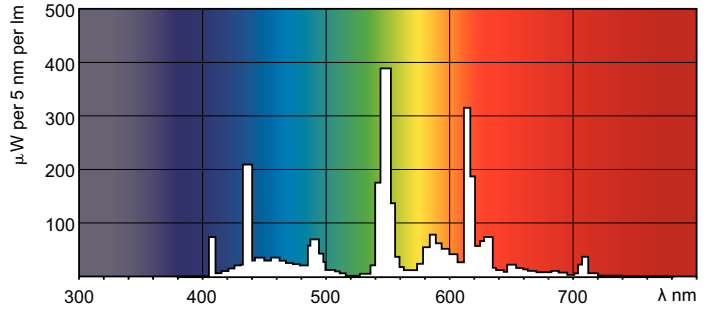


LDPB_PLT4PN_840-Spectral power distribution B/W

LDPO_PLT4PN_840-Spectral power distribution Colour


MASTER PL-T 4 Pin 4-針腳型

壽命

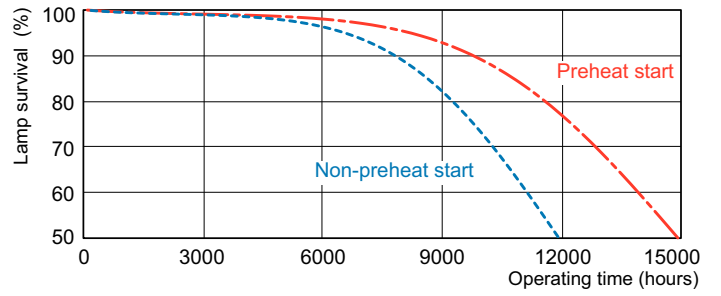

LDLE_PLT4PN_0001-Life expectancy diagram

LDLE_PLT4PN_0002-Life expectancy diagram

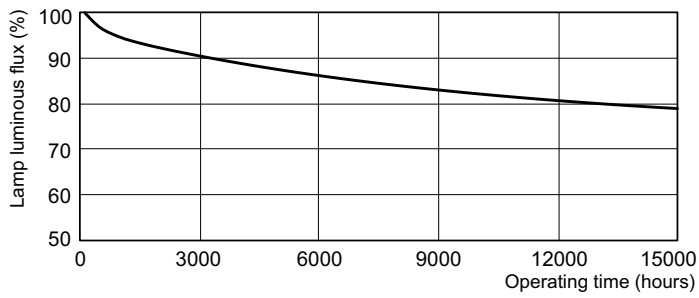

LDLM_PLT4PN_0001-Lumen maintenance diagram

