



MASTER PL-C 4 Pin

MASTER PL-C 13W/827/4P 1CT/5X10BOX

省電型精巧螢光燈管精巧型長電弧低壓水銀放電燈管套管內含 4 個平行細長螢光燈管

安全提示

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

产品数据


基本資訊		額定 SLMF (6000 小時)	
接口	G24Q-1 [G24q-1]	額定 SLMF (8000 小時)	81 %
至 50% 故障預熱的使用時間 (標稱)	13000 h	運作和電氣	
額定 LSF (預熱 2000 小時), 3 小時	99 %	Power (Rated) (Nom)	13.0 W
額定 LSF (預熱 4000 小時), 3 小時	98 %	燈具電流 (標稱)	0.170 A
額定 LSF (預熱 8000 小時), 3 小時	97 %	溫度	
額定 LSF (8000 小時), 3 小時	90 %	設計溫度 (標稱)	28 °C
照明科技		控制調光	
色碼	827 [CCT of 2700K]	可調光	是
光通量 (標稱)	925 lm	機械和殼體	
光通量 (額定) (標稱)	925 lm	接口資訊	4P
色彩名稱	白熾 白色	應用	
相關色溫 (標稱)	2700 K	汞 (Hg) 含量 (標稱)	1.4 mg
光效 (額定) (標稱)	69 lm/W		
演色性指數 (標稱)	82		
額定 SLMF (2000 小時)	92 %		
額定 SLMF (4000 小時)	87 %		

MASTER PL-C 4 Pin

能源消耗 kWh/1000 h	15 kWh
產品參數	
完整產品碼	871150062326300
訂購產品名稱	MASTER PL-C 13W/827/4P 1CT/5X10BOX
EAN/UPC - 產品	8711500623263
訂購代碼	927907182701

分子 - 各件數量	1
分子 - 每一外盒內件數	50
材質編號(12NC)	927907182701
淨重 (件)	49.900 g
ILCOS Code	FSQ-13/27/1B-E-G24q=1


二维绘图




PL-C 13W/827/4P

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-C 13W/827/4P 1CT/5X10CC	27.1 mm	27.1 mm	97.5 mm	117.0 mm	131.9 mm

光度数据

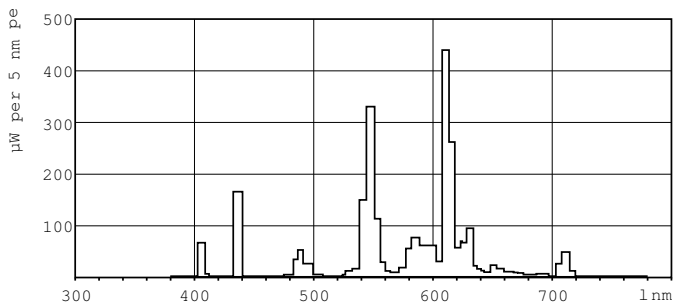



LDPB_PLC4P_827-Spectral power distribution B/W

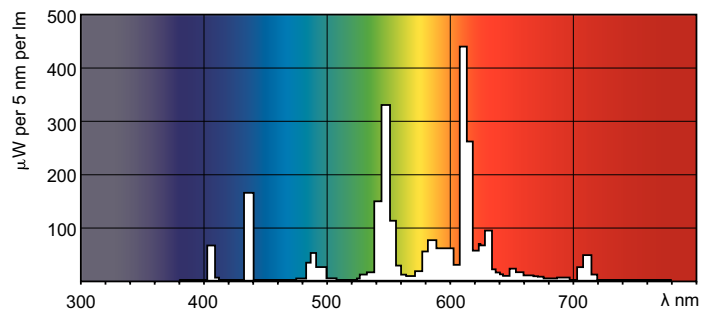

LDPO_PLC4P_827-Spectral power distribution Colour

MASTER PL-C 4 Pin

壽命

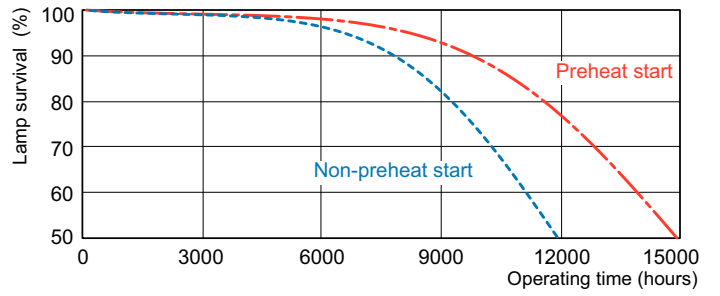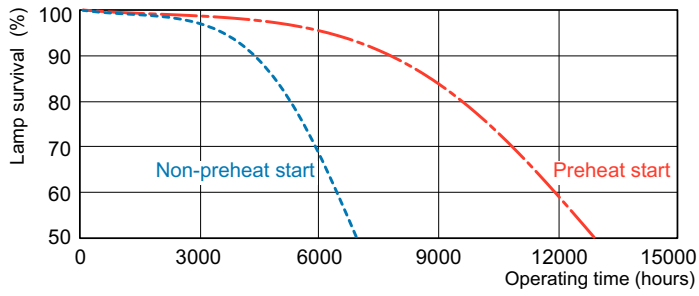

LDLE_PLC4P_0001-Life expectancy diagram

LDLE_PLC4P_0002-Life expectancy diagram



LDLM_PLC4P_0001-Lumen maintenance diagram

